


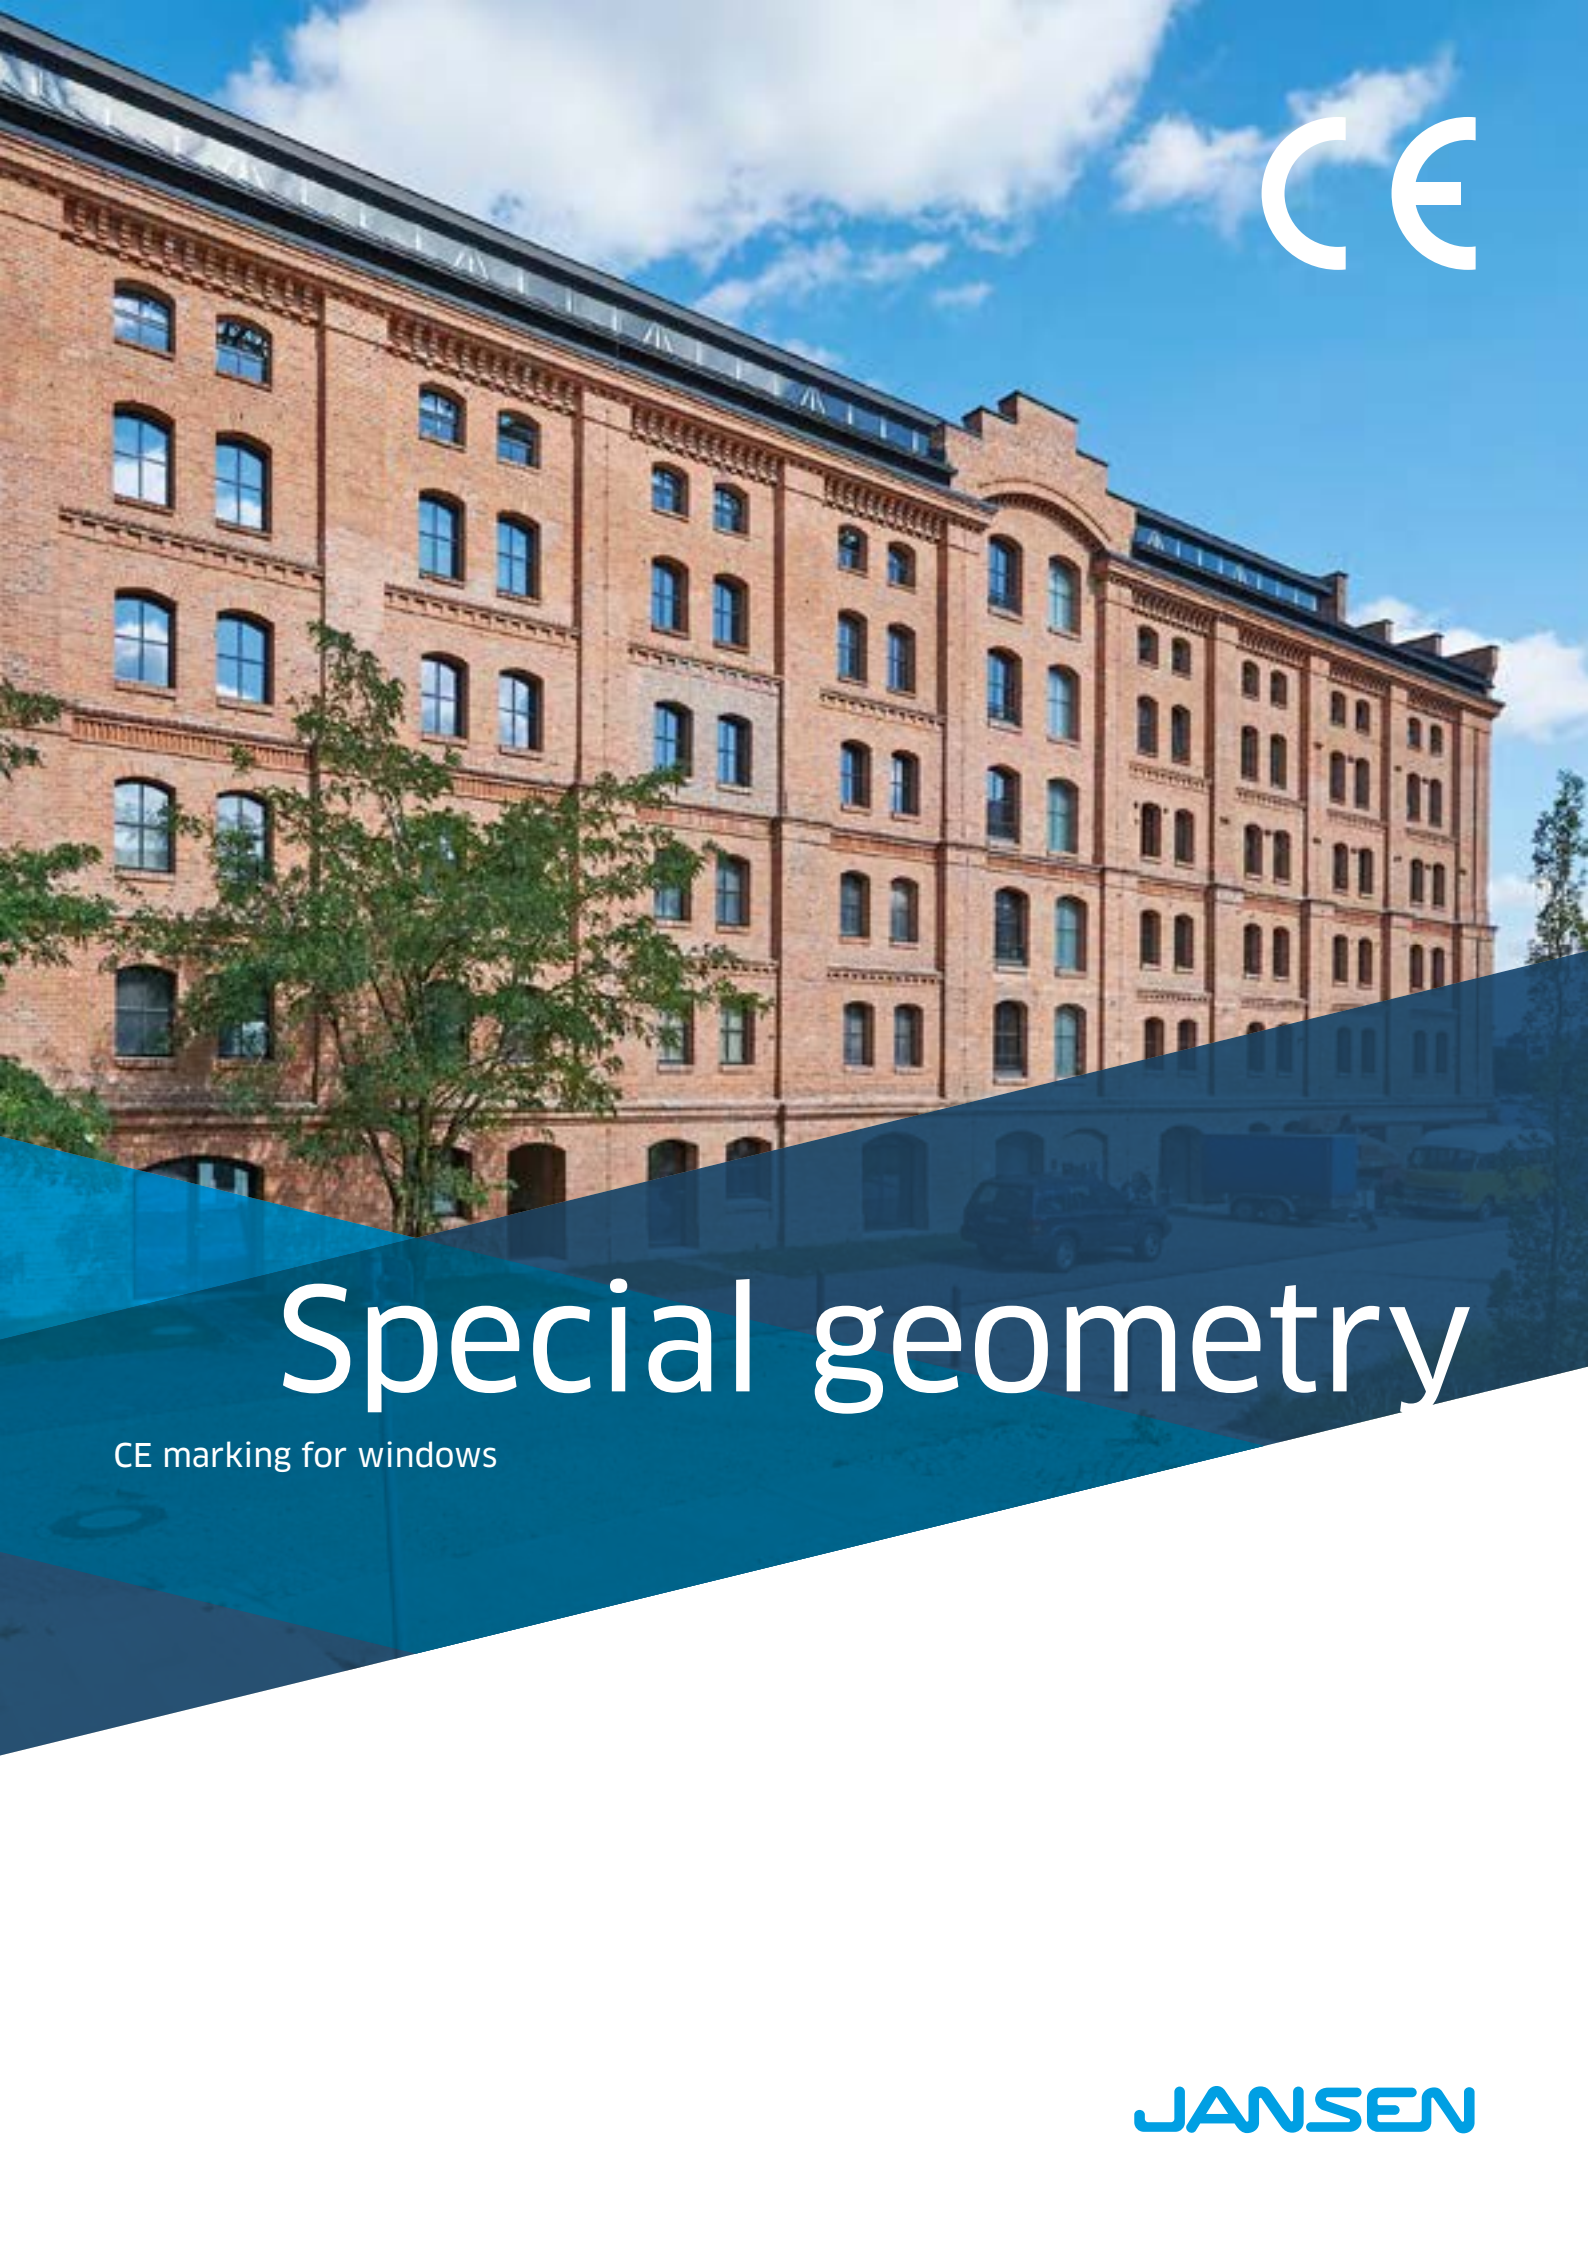

CE

Special geometry

CE marking for windows

JANSEN

Certainty through documentation – with special geometries too



Jansen windows

Security and quality are not just important for standard windows. A CE marking is now also possible for windows with special geometries as per the Construction Products Regulation (CPR) and product standard EN 14351-1.

All the necessary documents and instructions for the CE marking can be found at: docucenter.jansen.com


	
13 Any Metal Fabricator Ltd Any Street Any Town, X-00000 Country	
DoP No. 000000000000 Janisol 00000000 EN 14351-1:2006+A2:2016 Windows in domestic and commercial locations	
Watertightness Resistance to wind load Acoustic performance Thermal transmittance U_w Radiation properties – Solar factor – Light transmittance Air permeability	npd npd npd npd npd npd npd npd
Initial Type Testing carried out and classification reports created by Ift Rosenheim NB No. 0757, Giordano Institute NB No. 0407 and gbd LAB NB No. 2065	

Summary of types

Janisol / Janisol Primo



Studio window



Arched head window




Window with segmented arch




Bottom-hung window (curved)

inward-opening	•	•	•	•	•	
----------------	---	---	---	---	---	--

Janisol HI



Studio window





Bottom-hung window

inward-opening	•	•	•			
----------------	---	---	---	--	--	--

Janisol Arte



Studio window



Arched head window



Window with segmented arc



Bottom-hung window (curved)



Top-hung window

inward-opening	•	•	•	•	•	
outward-opening	•	•	•	•		•

The relevant performance values in accordance with EN 14351-1 are illustrated in the individual product ranges.

The expert appraisal reports must be observed in order to achieve the maximum performance values. docucenter.jansen.com

Jansen AG

Steel Systems

Industriestrasse 34
9463 Oberriet
Schweiz
jansen.com

JANSEN